

BRIEF INFORMATION

Reverse and warning alarm

- Housing made of sturdy plastic with high resistance to vibrations and shocks.
- Insulated electronics with epoxy to protect against rust, moisture and vibrations.
- Integrated bracket for universal mounting
- Power: 0.6 A max @ 9 - 48 V.

PRODUCT FEATURES

The reverse alarm is an indispensable element in high-risk work environments, where accidents are the order of the day. It fulfills the function of alerting when the vehicle goes in reverse emitting a alarm of high frequency that does not go unnoticed.

In some countries, regulations require the installation of a reverse alarm when motor vehicles are obstructed to the rear. The vehicle must have an audible reverse alarm above the surrounding noise level.

All bidirectional machines, such as rollers, compactors, front loaders, bulldozers and similar equipment, shall be equipped with a reverse alarm, which shall be different from the surrounding noise level and shall be operated as necessary when the machine is in motion. The reverse alarm must be maintained in operative conditions. Many of the regulations require a sound level higher than 90 dB.



TECHNICAL DETAILS


Technical specifications

Material	Black plastic housing
Mounting	With integrated bracket for universal mounting.
Level of acoustic intensity	1 m away: 110 dB(A) +/- 10dB
Voltage	9 - 48 V
Frequency	1200 Hz
Rated Continuous Current	6 A max
Operating temperature	-40 °C to +85 °C.
Protection class	IP67 (Resistant to water immersions)
Weight	281 gr / 0.62 pounds
Measurements	10.3 x 4 x 6.7 cm (4.05" x 1.57" x 2.63")
Country of origin	China

Target groups



Technical drawing

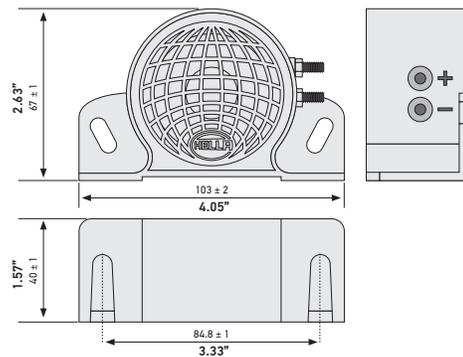

PRODUCT RANGE

Product	Packaging	Part Number.
---------	-----------	--------------

Reverse alarm Plastic blister Contains: 1 piece		009148142
---	---	------------------

Reverse alarm Boxed Contains: 1 piece		009148141
---	---	------------------

Product images



The features, specifications and availability of the product are subject to change without notice.

HELLA, Inc.
201 Kelly Drive
Peachtree City, GA, 30269
Tel.: +1 (877) 224-3552
Fax: +1 (770) 631-7574
www.hellausa.com
www.hellahd.com